


# ASSURANCE™ SUPPORT ARMS INSTALLATION



Note: It's easier to install arms before seat installation, but can be added after.

888.722.6488 | ToiletSeats.com




If seat caps are in place, use a thin, flat edge (putty or butter knife) to pry bumpers off of seat.

Press tab in middle hole to release cap. Pull cap out to remove.  
Press seat bumpers back into place.

**1**

L  
Front

R  
Front

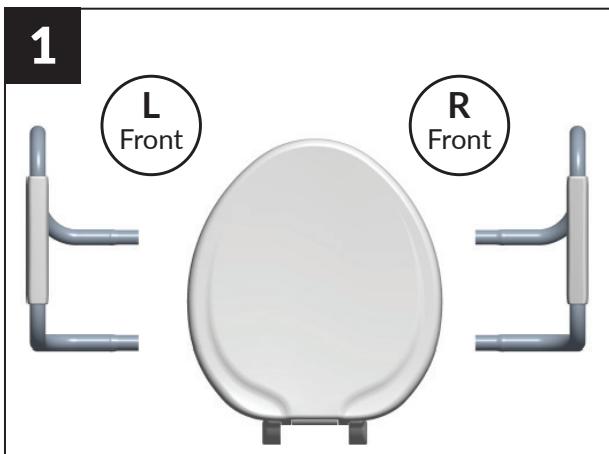


Confirm support arms are on correct sides.

**2**




Slide support arms into mounting holes.

**3**

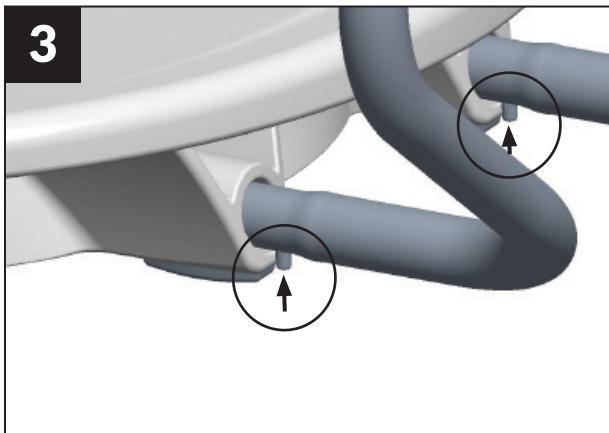

Press lock buttons into arms.

**4**

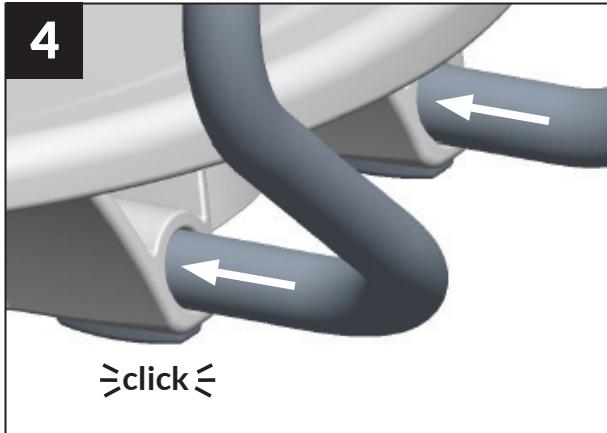

Continue sliding arms into seat until lock buttons click into place.